

Coffee tables




T01, T02, T03

SPECIFICATION SHEET

MFC TOP

30mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) circular (T01, T03) or square (T02) top finished with 2mm matching straight ABS impact resistant edges.
Panel density: 670/730 kgs per cubic meter

Finish options:

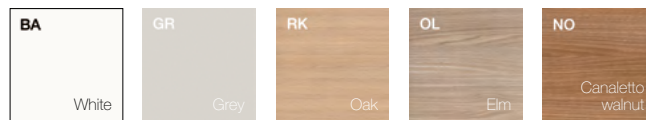


METAL FRAMES

T01 - epoxy powder coated steel column base made of a 1.5mm thick \varnothing 80mm column and a 6mm \varnothing 500mm base. Translucid seal along the perimeter of the base to prevent marking.

T02 - epoxy powder coated steel column base made of a 1.5mm thick 60x60mm square column and a 6mm thick 480x480mm square pyramid shaped base. Translucid seal along the perimeter of the base to prevent marking.

T03 - single-piece cone-shaped 1mm thick epoxy powder coated steel weighted base. Includes adhesive felt pads to prevent marking.

Finish options:

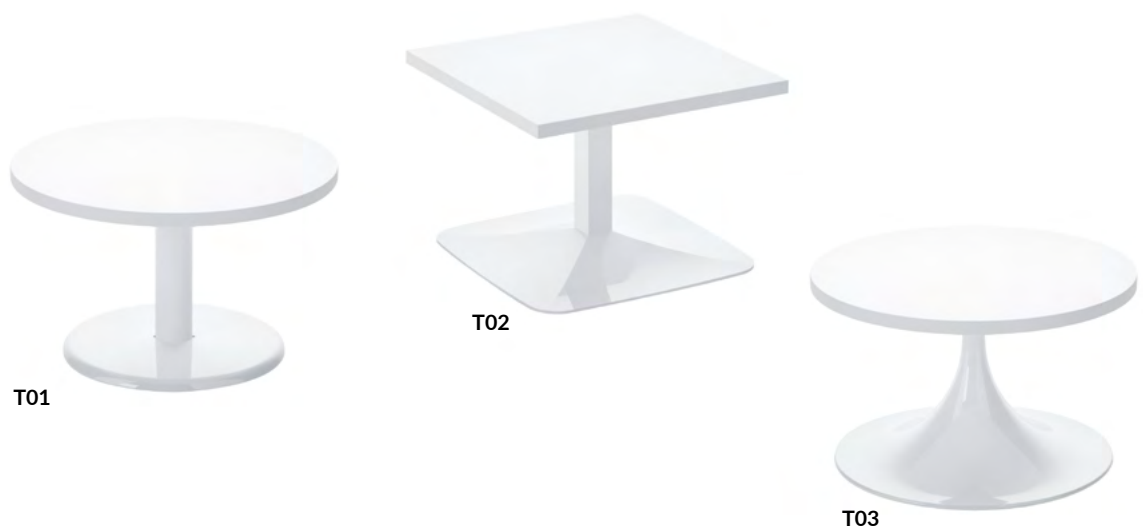


SPECIFICATION SHEET

MFC TOP

25mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) top finished with 2mm matching straight ABS impact resistant edges, radiused corners. Panel density: 670/730 kgs per cubic meter

Finish options:

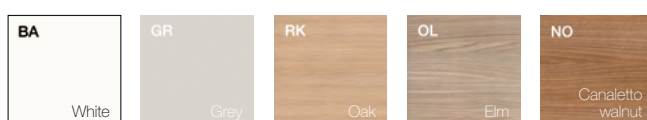

GLASS TOP

10mm back-painted tempered safety floating glass top finished with 1.5mm 45° polished edges, 10mm radiused corners.


Finish options:



* Back painted in a light green finish using scratch-resistant ceramic enamels

METAL FRAME

50x50mm steel square legs complete with $\varnothing 35$ mm grey polyethylene 0-15mm adjustable levelling feet. Legs are linked together by a perimeter frame made of 50x20mm steel tubes. Legs and frame supplied epoxy powder coated or chromed.



$\varnothing 35$ mm grey polyethylene 0-15mm adjustable levelling feet.

Finish options:



SPECIFICATION SHEET


MFC TOP

30mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) top and perimeter panels finished with 2mm matching straight ABS impact resistant edges. 45° mitred top and panels. Available in melamine or lacquered. Panel density: 670/730 kgs per cubic meter

BASE

Top and perimeter panels are supported on a 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) base finished with 1.5mm matching straight ABS impact resistant edges. Supplied with ø20mm polyethylene 0-8mm adjustable levelling feet.

Melaminici:

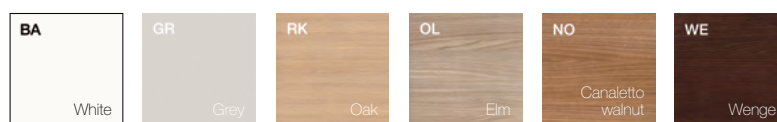

Laccati:




SPECIFICATION SHEET

MFC TOP

30mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) top finished with 2mm matching straight ABS impact resistant edges. Radiused corners. Panel density: 670/730 kgs per cubic meter

Finish options:



GLASS TOP

12mm tempered safety floating glass top finished with 1.5mm 45° polished edges.

Finish options:



* Back painted in a light green finish using scratch-resistant ceramic enamels

METAL FRAME

Metal trumpet base leg made of a cone-shaped column (140mm max dia, 100mm min dia) and a Ø590mm 6mm steel molded base. The top screws to a metal plate linking the top to the column base. Supplied epoxy powder coated.

Finiture



SUSTAINABILITY & CERTIFICATIONS



MATERIALS AND RECYCLABILITY

Panels used on Coffee tables range are exclusively 100% made by recycled wood and respect low formaldehyde emission (CATAS certification Quality Award Formaldehyde E1). Resins used on panels and melamine paper are SVHC substances free (reported on ECHA list update to 12/01/2017).



CERTIFICATIONS

Constantly receptive to market requirements, Quadrifoglio Group pay special attention on quality and safety contents in order to provide high products and services. The Company has reached certifications UNI EN ISO 9001/2008, UNI EN ISO 14001/2004 and BS OHSAS 18001/2007 to confirm his policy. Our products are certified and ensured by FSC™ and ECOLOGICAL PANEL.

COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =
= ISO 14001 =
= OHSAS 18001 =



GREEN ENERGY

The Company had installed the photovoltaic system with 4.500 solar panels in a 7.350 m² surface that covers almost entirely the factory. The photovoltaic is able to produce 1Mw of a quiet green energy, that does not harm the environment and is waste-free. With his high production capacity the photovoltaic allows us to reduce emissions in the atmosphere of all those polluting substances and to those that contribute to the greenhouse effects. Consequently, such measures make us save every year 180 tonne of petrol oil, 440 tonne of CO₂, 514kg of sulphur dioxide, 448 kg of nitrogen oxide and 23kg of dust.



TRANSPORT

Packaging is reduced in order to decrease volumes. Goods collections are responsibly managed and organised with the aim of optimise transports, reducing atmosphere emissions.